

Full Length Research Paper

Water loss, sediment deposition-pond age relationships in Lagos State, Nigeria

Omofunmi O.E.¹, and Olorunnisola O.A²

¹Department of Agricultural and Bio-Environmental Engineering, Yaba College of Technology, Yaba Lagos, Nigeria.

²Department of Agricultural and Environmental Engineering, University of Ibadan, Ibadan, Nigeria.

Accepted 02 March, 2016

The investigation was carried out to identify and proffer solutions to some environmental and management problems that have hitherto affected fish production sub-sector of the economy, using Lagos State, (Western) Nigeria as a case study. It was observed that the maximum temperature in the study area ranged between 27.6 °C and 31.8 °C in February, while the minimum temperature ranged between 23 °C and 26.8 °C with the least being in July. Values of water loss from ponds resulting from evaporation and seepage ranged from 2.5 – 4.6 day⁻¹. Percentage reduction in pond water depth during dry season ranged from 70 – 81 % as compared to the observed percentage increase during rainy season with range of values as, 17 – 34%. The mean rise and fall in water depth were 24.7 ± 3.8 % and 47.6 ± 11.7% respectively. The fall in water depth during dry season was almost twice its rise during rainy season. The degree of variation among ponds was found to be significant (t=2.11 at p = 0.05). The mean rate of soft sediment depth was 10.5 ± 1.8 cm yr⁻¹, while the soft sediment depth in silty sand ponds doubled those from mixed sandy ponds. The predictive equation indicated that soft sediment accumulation was found to increase with year of pond operation. The results showed significant correlation (t = 1.988. p = 0.05) between soft sediment and year of pond operation. Long hydraulic residence time averaging 250 days in the ponds investigated enhanced high level of organic stimulations.

Key words: Climate, season, sediment, water depth, water loss, pond age, Lagos State.

INTRODUCTION

Fish production from culture fisheries have been all time low in Nigeria (Ajana, 2003). Omofunmi (2010) highlighted that fish ponds have faced many problems among which are seepage, high water table, and sediment accumulation. The sediment-water interface in aquatic system, including aquaculture ponds, was a bridge connecting bottom sediments with the overlying water column. Nutrient concentrations in pond bottom soil are typically two to four orders of magnitude higher than in water (Ram et al., 2007; Lee, 2005; Boyd, 2009); that was, the amounts of most chemical components in a 1-

cm surficial pond soil layer are generally higher than those present in 1 m of overlying water. Materials settling from the water column to the sediment can be derived from two sources. First, particulate organic matter, consisting of biogenic material with specific gravities greater than water such as senescent algae, fish excreta, and feed residues, continuously settle from the water column. In some cases, sedimentation from the water column includes suspended matter imported with water supply. Particles resuspended from the pond bottom are a second source of sedimenting material. Ponds have external and internal sediment loads. Freshwater ponds filled by runoff from denuded watersheds and brackish water ponds filled from estuaries are laden with suspended soil particles. Internal sediments result from

turbulence that erodes pond bottom soils, levees and suspended particles. Sources of turbulence are wind action, aquatic animal activity, mechanical aeration and harvest operation. Long residence time favours sedimentation of suspended particles and ponds behave as sediment basins. Studies on the soil as they affect fish pond performance and productivity have been carried out by researchers such as Sinha and Ramachandran, 2001; Jhingram, 2002 and Kumar, 2004. Climatological data are classified into meteorological and hydrological data. The importance of climatological data was highlighted by Coche, (2006) that it helps in the estimation of height, size and capacity of dike and also influences the choice of pond depth and pond location. In the coastal area, the presence of vegetation has sometimes been used for the assessment or an indicator of soil property. The presence of red mangrove *Rhizophora* spp was identified with highly acidic nature of the soil in the prevalent area (Singh, 2007). The presence of *Nypa fruticans* and *Meleuca* especially in tidal brackish waters were observed (Singh, 2007). These species were assessed to be strong indications of acid sulphate soils, while *Avicenia* was generally associated with less acidic soils. Evaporation rates, temperature and wind velocity are among climate parameters that are important in pond design and operation. Coche (2006) suggested that addition of annual evaporation allowance of 1250mm to the water budget for pond operation. Evaporation contributes to the fall in water depth, rise in water temperature and reduction in dissolved oxygen content of the pond (Huet, 2000 and Kumar, 2004). According to Boyd (2009) most ponds are static water system, while others are characterised by copious water exchange. Water seldom exceeds 20 – 30 % of pond volume per day and it is usually much less. Physical problems identified by Sinha and Ramachandran, 2001; Jhingram, 2002; Coche, 2006, and Kumar, 2004 include, seepage, piping flood hazard, leakage of dike. Rot (corrosion) of construction materials, siltations, cracking of dike and drying of pond. Sinha and Ramachandran, (2004) estimate indicated about 20 % rises in normal water depth in ponds sited in swamp areas of India attributed to seepage. Similarly, Jhingram, (2005) findings indicated about 20 – 60 % fall in normal water depth of ponds sited in swamp areas and also stated that about 5 % loss in fish farm investment was attributed to seepage. Flood effects in the pond performance have been examined by several investigators such as Kumar, 2004; Huet, 2002 and Pillay, 2003. They reported that the flood accelerated the erosion of ponds, aid the quick collapse of pond structures, introduce predator to ponds, increase the cost of maintenance of ponds, enhance siltation (sediment deposition) and increase loss of fish pond investment. With the expansion of pond culture system in Nigeria, the importance and crucial role of engineering expertise cannot be over-emphasized. Planning for the site selection, design, and construction of a pond is one of the

most important steps in the pond management process (Whitis, 2002). Common design and construction mistakes can result in pond seepage. Poor selections of sites, lack of hydrological data and defective design and construction of pond structures have often been the cause of failures of fish pond. The objective of this study was to conduct a diagnostic survey of some selected fish farms in Lagos State, Nigeria, with a view to identifying some of the factors that could be accountable for observed low production from the culture fisheries sub-sector.

MATERIALS AND METHODS

Study Area: Lagos State, southern Nigeria falls within longitudes $03^{\circ}50'$ E and $03^{\circ}38'$ E and latitudes $06^{\circ}20'$ N and $06^{\circ}38'$ N. It has an area of $3,577\text{km}^2$ with about 20% of this covered by lagoon and associated creeks. The area is characterized by humid climate with distinct dry and wet seasons lasting November to March and April to October respectively (Fig. 1).



Figure 1. Map of Lagos State showing the study area.

FIELD SURVEY AND DATA COLLECTION

Forty five fish ponds were chosen for this study. The rationale for the choice of ponds was predicated on the assumption that such ponds are sited in geographical areas fairly represented of the soil and climate characteristics in Lagos State. Monthly trips were made to the selected ponds during the rainy and dry season respectively. Primary data collections for the study were based on both on-the-spot assessment of selected fish farms and administration of structured questionnaire designed for fish farm operators. Secondary data on climatology were collected from associated government

agencies. Data on temperature and evaporation are presented in Tables 3 and 4 respectively. Pond water depth was determined by sounding technique employing an improved 5m long graduated bamboo pole fitted at the base with a wooden disc of 5cm diameter. The results of the measurement are presented in Table 1. Simultaneously; sediment accumulation was measured with the same device, but a 10cm diameter disc. The results are presented in Table 2.

DATA ANALYSIS

Data were analyzed using descriptive statistics. Student's t-test was applied to determine the differences between soft sediment deposition and length of pond operation and also change in water level amongst the ponds.

RESULTS AND DISCUSSION

Presented in Table 1, are mean values of water depth obtained for selected ponds during rainy and dry seasons. The mean rise in water depth in the rainy season was $24.7 \pm 3.8\%$ with a range of 17 – 34%. The mean fall in water depth in the dry season was $47.6 \pm 11.7\%$ with a range of 70 – 81%. The fall in water depth during drought was almost twice its rise during rainy season and this is buttressed by the degree of variations among ponds which was found to be statistically significant ($t=2.11$ at $p=0.05$). The falls in water level during dry season was caused by seepage and evaporation; conversely, the rise in water level was caused by seepages as well as flood. Rapid change in water level appears to be serious in almost all the ponds in the study area. Values of water loss from the ponds resulting from evaporation and seepage ranged from $2.5 - 4.6 \text{ mm day}^{-1}$. Our observation that the fall in water depth during drought was almost twice its rise during rainy season is in agreement with that of Jhingram (2002) who reported that fall in water depth during dry season is more severe compared with the rise in water level during the rainy season. However, our finding differs slightly from observations made by Sinha and Ramachandran, (2001) which may be attributed to variability in installation modes. For the avoidance of doubt, Sinha and Ramachandran, (2001) estimated about 20 % rise in normal water depths in ponds sited in swampy area, while we obtained $24.7 \pm 3.8 \%$ with a range of 17 – 34 %. This difference may be due to different soil types, different degree of puddling or compaction especially during construction and level of treatment applied to the ponds. Besides, evaporation and seepage, the observed trends in the rise and fall in the pond water level in the study area and characterised by marked seasonal variations, may be attributed to such factors as, excessive fertilization with organic manure, soil types which allow for infiltration of water through the organic

laden pond dikes and embankments, high insolation for most of the year which enhance high level of evapotranspiration in the height of the pond walls as a result of rapid decomposition of the material used. Organic sediments in the ponds originate primarily from plankton while other sources include; manure application, uneaten feed, aquatic animal faeces and aquatic vegetation. An understanding of sediment sources and the principles of sedimentation are of practical value to pond managers.

The mean rate of soft sediment depth was $10.5 \pm 1.8 \text{ cm/yr}$. The result shows significant relationship ($t = 1.988$ and $p = 0.05$) between soft sediment and deposition and year of pond operation. Equation (1) shows the predictive equation between soft sediment deposited and length of pond operation. Figure 1 shows a graphical representation of the relationship between soft sediment accumulation and years of pond operation.

A predictive equation for sediment deposition in a pond system

$$S = 9.3 + 7 (Y - n) \quad (1)$$

where,

S = Soft sediment depth (cm)

Y = Year of pond operation

n = Sediment coefficient factor, was used with consideration for the soil types and their corresponding sediment coefficient factors (See Table 4).

Over a period of several years, sediments can fill ponds and severely interfere with pond operation. Average sediment depth of 45cm was observed for a five-year old shrimp pond in Ecuador (Boyd, 2009). This scenario in Ecuador is not too different from our result as a sediment depth of 43.4cm for five-year old operations. This high value of sediment depth can be attributed to some fish ponds that are heavily treated with manure. Application rates normally ranges from 50 – 100kg per month as extracted from the administered. It has been observed from structured questionnaires even though manure stimulates phytoplankton production, the life span of phytoplankton cells range from 1–2 weeks with resultant dead cells settling at the pond bottom. Most of the ponds investigated in this study have never been denuded since they came into operation, and this accounts for accumulation of silt with reduction in pond depth. In consequence, low level of dissolved oxygen can prevail because of high temperature resulting from quick light penetration of the shallow pond water besides high biological oxygen demand (BOD) occasioned by the degradation of the organic load. Long hydraulic residence time averaging 250 days in the ponds investigated, presupposed a semi-intensive method of fish culture, hence the high level of organic sedimentations. The predictive equation indicated that soft sediment accumulation was found increase with year of pond operation. The results showed significant correlation ($t = 1.988$, $p = 0.05$) between soft sediment and year of pond operation.

Table 1. Water depth during rainy and dry seasons for selected ponds respectively in Lagos State.

Code	Actual Pond Depth (m)	Rainy Season Depth (m)	Dry Season Depth (m)
1	1.60	1.92	0.80
2	1.50	1.90	0.60
3	1.50	1.95	0.75
4	1.50	2.01	0.41
5	1.60	1.95	0.81
6	1.50	1.60	1.20
7	1.80	2.30	0.95
8	1.60	1.93	0.92
9	1.50	1.94	0.91
10	1.60	1.88	0.91
11	1.60	1.94	0.83
12	1.60	1.93	0.78
13	1.60	1.95	0.46
14	1.60	1.93	0.78
15	1.55	1.92	0.81
16	1.50	1.95	0.62
17	1.51	1.88	0.83
18	1.50	1.92	0.58
19	1.50	1.89	0.83
20	1.60	1.93	0.84
21	1.60	1.96	0.73
22	1.60	1.92	0.85
23	1.50	1.88	0.79
24	1.53	1.92	0.81
25	1.51	1.92	0.76
26	1.60	1.95	0.28

Table 1. Cont.

27	1.60	1.89	0.75
28	1.59	1.95	0.81
29	1.50	1.98	0.88
30	1.51	1.92	0.75
31	1.50	1.94	1.10
32	1.50	1.75	0.99
33	1.50	1.85	0.95
34	1.51	1.88	0.96
35	1.50	1.95	0.98
36	1.60	1.96	0.96
37	1.50	1.90	0.94
38	1.60	1.98	0.96
39	1.50	1.95	1.20
40	1.60	1.85	0.88
41	1.50	1.95	0.74
42	1.50	1.88	0.76
43	1.60	1.98	0.74
44	1.50	1.93	0.69
45	1.50	1.89	0.81

CODING

1 – 10	Badagry Location
11 – 15	Ojo Location
16 -17	Ajeromi Ifelodun Location
18 – 25, 30 – 40	Ikorodu / Majidun Location
26 – 29	Ibeju Lekki Location
41 – 45	Agege / Iju Location

Table 2. Relationship between Soft Sediment Depth and Year of pond operation of selected Fish Ponds in Lagos State.

Code	Years of Operation (Yr)	Soft Sediment Depth (cm)
1	3	30.5
2	6	42.1
3	6	40.1
4	4	32.5
5	3	28.4
6	4	46.3
7	5	50.3
8	4	31.6
9	4	36.3
10	5	43.6
11	4	49.3
12	6	45.4
13	3	26.4
14	2	18.2
15	3	24.3
16	3	26.4
17	4	33.6
18	5	43.3
19	1.5	20.9
20	4	36.8
21	3	28.6
22	3	29.6
23	6	68.3
24	2	21.6
25	3	36.3
26	4	43.6
27	2	22.1
28	3	33.8

Table 2. Cont.

29	1.5	20.4
30	4	48.3
31	3	36.3
32	5	40.1
33	2	19.8
34	3	27.9
35	4	41.3
36	3	40.2
37	2	19.8
38	4	46.3
39	2	20.6
40	3	39.8
41	4	43.8
42	3	38.8
43	3	39.8
44	3	38.3
45	2	24.2

Table 3. Mean Daily Minimum and Maximum Temperature ($^{\circ}\text{C}$) the Period (1982 – 2013)

Month	Minimum Temp.($^{\circ}\text{C}$)	Maximum Temp.($^{\circ}\text{C}$)	Average Temp.($^{\circ}\text{C}$)
January	24.0	30.9	27.5
February	24.8	31.8	28.3
March	25.5	31.4	26.5
April	25.0	28.2	26.6
May	24.9	27.6	26.3
June	23.4	28.7	26.1
July	23.1	27.0	25.1
August	23.2	27.3	25.3
September	23.3	27.9	25.6
October	23.6	29.1	25.7
November	24.5	30.0	27.5
December	24.4	30.9	27.7

Table 4. Mean Daily Evaporation (mm) the Period (1982 – 2013).

Month	Minimum Evaporation (mm)	Maximum Evaporation (mm)	Avg. Evaporation (mm)
January	6.1	2.8	4.0
February	5.4	4.0	4.8
March	4.7	4.1	4.5
April	4.2	3.4	3.8
May	3.7	3.4	3.5
June	3.1	2.8	2.9
July	2.9	2.1	2.8
August	2.7	2.2	2.6
September	2.6	2.2	2.5
October	3.0	2.6	2.8
November	3.9	3.2	3.8
December	3.6	3.5	3.6

Table 5. Sediment Coefficient factor of soil types.

Soil type	Sediment coefficient factor (n)
Mud bottom	-
Sandy soil	1.0
Sandy clay	0.9
Loam	0.5
Clay loam	0.6
Clay	0.8

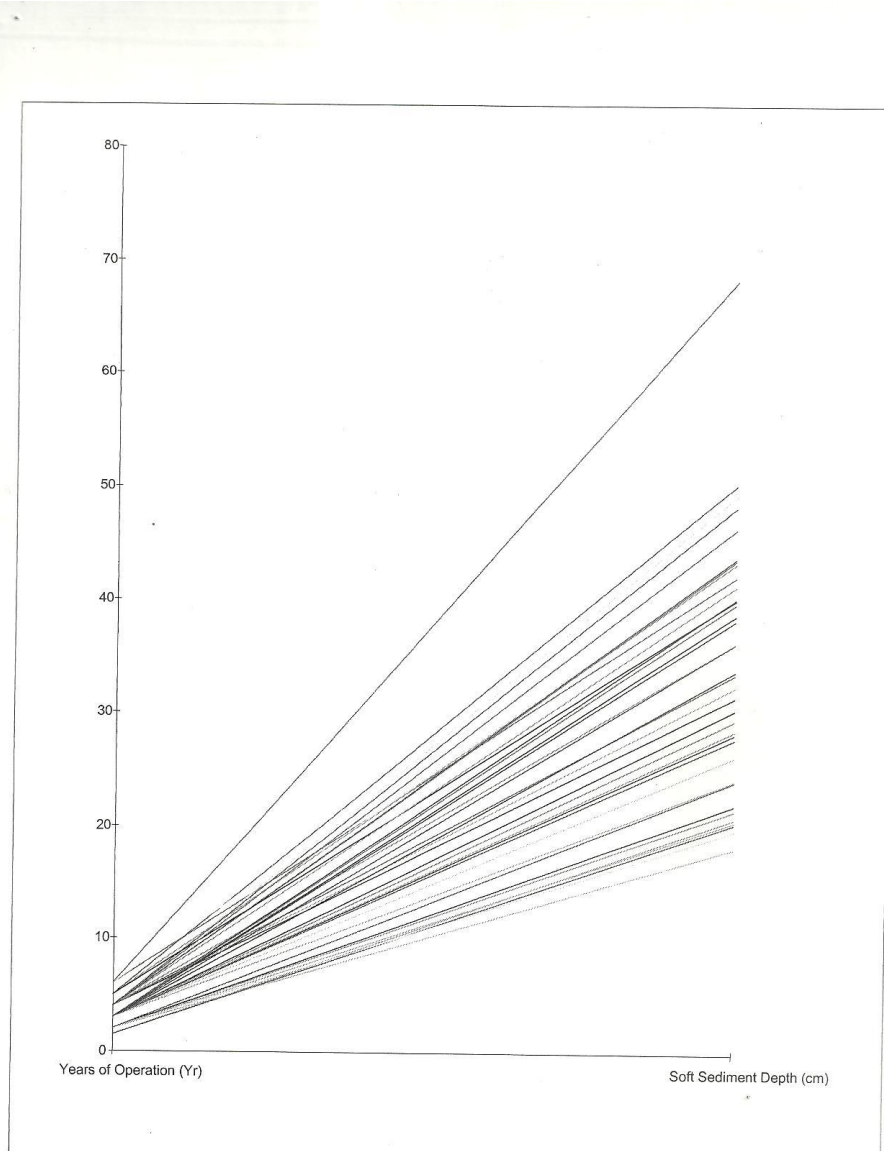


Figure. 2. Relationship between soft sediment deposition and length of pond operation.

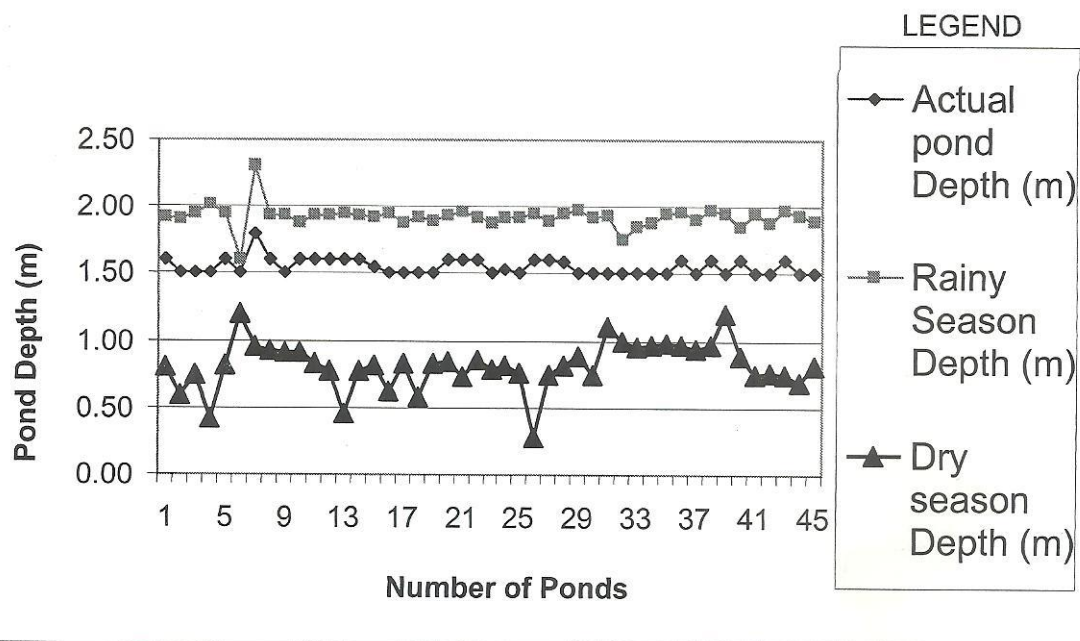


Figure 3. Pond Depth Comparison in the Study Area.

CONCLUSION

The effects of seepage and soft sediment deposition on the biological, physical and chemical proportion of pond water can to a great extent affect fish production except appropriate management tools are employed. Excessive application of organic manure especially, poultry droppings by direct deposition in the pond as direct or indirect food by farmers should be discouraged.

ACKNOWLEDGEMENT

The authors express their thanks and appreciation to the following persons, who have contributed in no small measure to the implementation of this paper: Professors E.B. Luca and A.Y. Sangodoyin, University of Ibadan, Ibadan, Nigeria.

REFERENCES

- Ajana AM (2003). Economic Development of the Niger Delta. The role of Fisheries. A paper presented at the Niger Delta stakeholders agricultural forum , organized by NDDC Port Harcourt 1th – 3rd April.
- Boyd CE (2009). Bottom soils, sediments and pond aquaculture pp. 219 – 221.
- Coche AG (2006). Simple Method for Aquaculture Soil Fresh Water Fish Culture Vol. 8 Pg.10 -34, 44 – 59.
- Coche AG, Muir JR (2002). Simple Method for Aquaculture Pond Construction for Fresh Water. Fish Culture, 20 (4). 174-186.
- Huet M (2000). Textbook of Fish Culture Breeding and Cultivation of Fish. Farnham, Survey Fishing News books, Revised and Enlarged 5th Edition, New York.
- Jhingram VG (2002). Fish and Fisheries of India, Revised and Enlarged 6th Edition, Hindustan Pub. Corporation, Delhi, India.
- Kumar P (2004). Fish Culture in Undrainable Ponds, Central Institute of Fisheries Education, India Agricultural Research Versova, Bombay, India, pp. 32 – 43; 94-123.
- Lee GF (2005). Factors affecting the transfer of materials between water and sediments. Eutrophication information Program Literature Review. University of Wisconsin, Madison, Wisconsin, USA.
- Omofunmi OE (2010). A Technical assessment of fish ponds in Lagos State, Nigeria. M.Phil. Thesis (Unpublished)
- Pillay TVR (2003). Planning of Aquaculture Development. Introduction; Guide Fanham, Survey fishing News Book Limited, FAO pp.12 - 54
- Ram MN, Zur O, Avnimeiech Y (2007). Microbial changes occurring at the sediment-water interface in an intensively stocked and fed aquaculture 27: 63 -72.
- Sinha VRP, Ramachandran V (2001). Fresh Water, Fish Culture, India Centre of Aquaculture Research, (ICAR), (6), pp. 20 – 40.
- Singh VP (2007). The management of fish ponds with acid Sulphate Soils. Asian Aquaculture 12 (3) pp. 30 - 35
- Whitis GN (2002). Watershed fish production ponds: guide to site selection and construction. Texas Cooperative Extension. Southern Regional Aquaculture Publication SRAC 102. pp. 12-14.

